


LS2208

Quick Start Guide

<http://www.zebra.com/ls2208>


STEP 1 - ATTACH CABLE TO SCANNER

POST IN WORK AREA

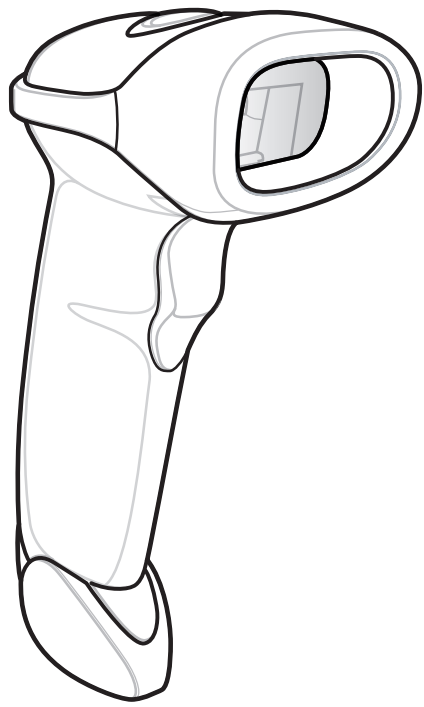


See Product Reference Guide for detailed information

Attach Cable

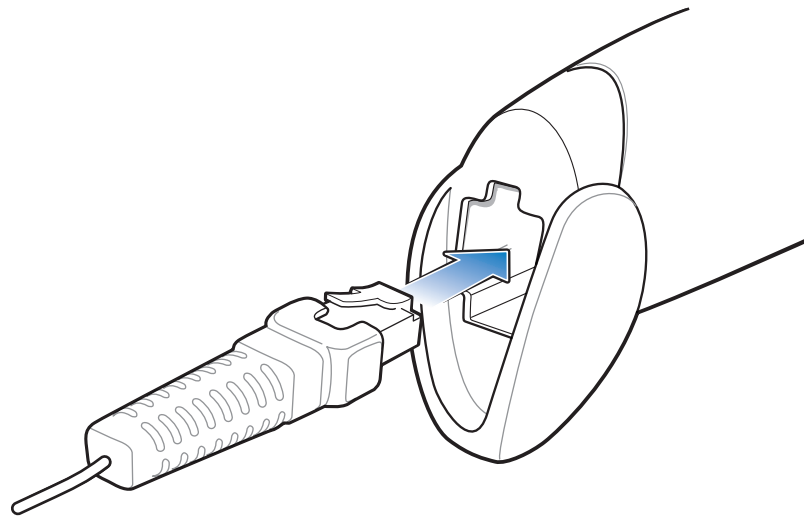


Remove Cable (to change interface)

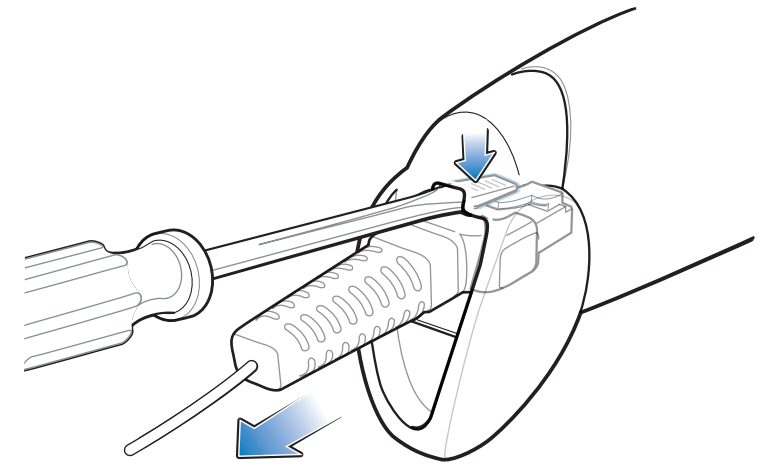


STEP 2 - CONNECT CABLE TO A HOST

NOTE: Cables may vary depending on configuration.


USB

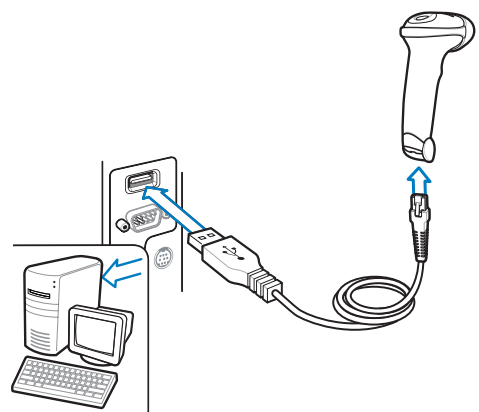


Keyboard Wedge

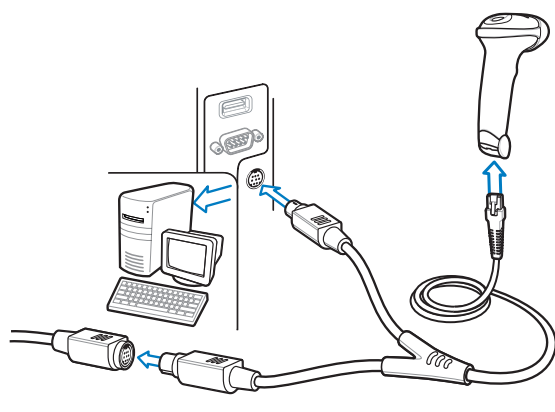

RS-232

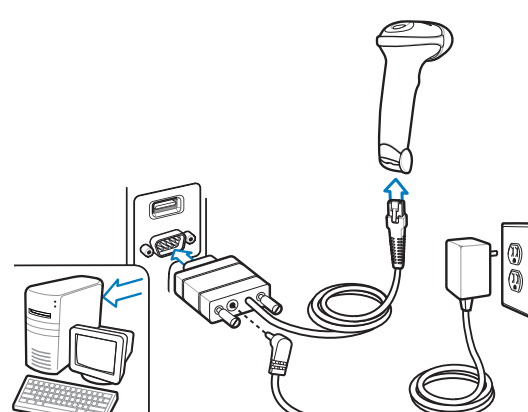

IBM 46XX

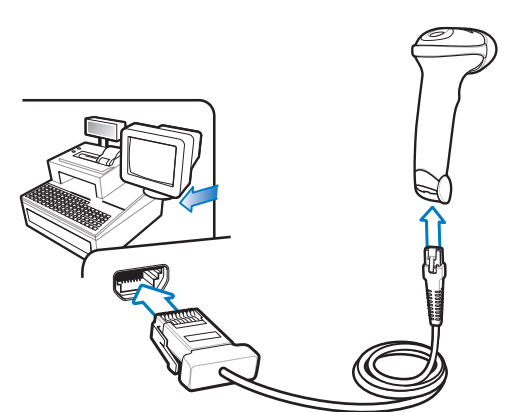

STEP 3 - SET UP INTERFACE (Scan Host Bar Codes)

Important: Out of box, Keyboard Wedge and USB interfaces require no bar code scan setup. Bar codes are provided for complex programming or interface changes.

USB

Scan **ONE** of the bar codes below



IBM HAND-HELD USB



HID KEYBOARD EMULATION

Keyboard Wedge

Scan **ONE** of the bar codes below



IBM AT Notebook



IBM PC/AT and IBM PC COMPATIBLE

RS-232

Scan **ONE** of the bar codes below



OPOS/JPOS



STANDARD RS-232

IBM 46XX

Scan **ONE** of the bar codes below



ADD AN ENTER KEY (CARRIAGE RETURN/LINE FEED)

To add an **ENTER** key after scanned data, scan all **THREE** bar codes below in numerical order.

1



SCAN OPTIONS

2



<DATA><SUFFIX>

3



ENTER

ADD A TAB KEY

To add a **Tab** key after scanned data, scan all **THREE Enter** key bar codes above in numerical order then scan all **FIVE** bar codes below in numerical order.

1



SCAN SUFFIX

2



7

3



0

4




0

5



9

HANDS FREE STAND

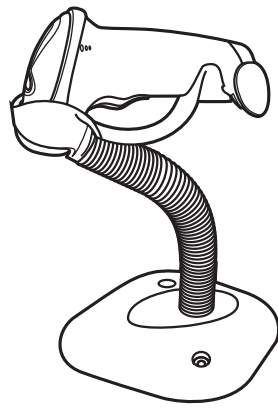

SET DEFAULTS

OPTIMUM SCANNING

123SCAN²

Return to Factory Defaults



SET DEFAULTS



123Scan² is an easy-to-use, PC-based software tool that enables rapid and easy customized setup via a bar code or USB cable. For more information, visit: <http://www.zebra.com/123Scan2>.

LED Indications

- Off**: Scanner is on and ready to scan, or no power to scanner
- Green**: Bar code is successfully decoded
- Red**: Transmission error

Beeper Indications

- Standard Use**
- Low/medium/high beep: Power up
 - Short medium beep: Bar code decoded
 - 4 long low beeps: Transmission error detected, data is ignored
- Parameter Menu Scanning**
- High/low/high/low beep: Successful parameter setting
 - High/low beep: Correct programming sequence performed
 - Low/High beep: Incorrect programming sequence or 'Cancel' bar code scanned

Troubleshooting

Scanner not working

- No power to scanner**: Check system power; ensure power supply, if required, is connected
- Incorrect interface cable used**: Ensure that correct interface cable is used
- Interface/power cables are loose**: Ensure all cable connections are secure

Scanned data incorrectly displayed on host

- Scanner not programmed for correct host interface**: Scan appropriate host parameter bar codes

Scanner decoding bar code, but data not transmitting to host


- Scanner not programmed for correct host interface**: Scan appropriate host parameter bar codes
- Interface cable is loose**: Ensure all cable connections are secure

Scanner not decoding bar code


- Scanner not programmed for bar code type**: Ensure scanner is programmed to read type of bar code being scanned
- Bar code unreadable**: Ensure bar code not defaced; try scanning test bar code of same bar code type
- Distance between scanner and bar code incorrect**: Move scanner closer to or further from bar code

RECOMMENDED USAGE GUIDE - OPTIMUM BODY POSTURE

Avoid Extreme Wrist Angles

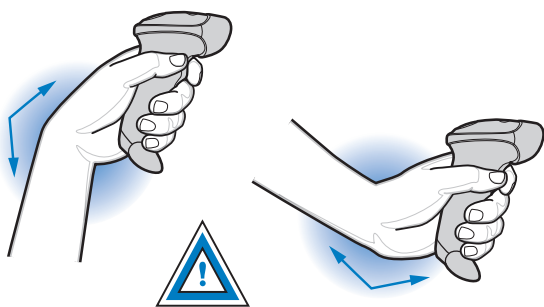

Avoid Bending

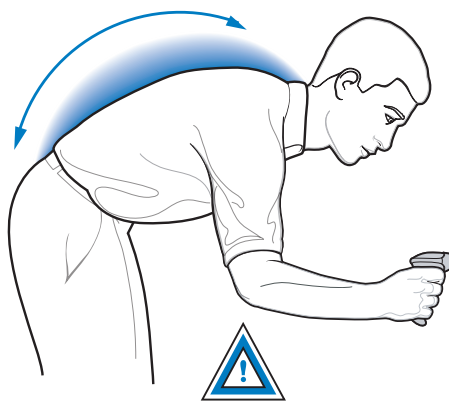

Avoid Reaching



Ergonomic Recommendations

Caution: In order to avoid or minimize the potential risk of ergonomic injury follow the recommendations below. Consult with your local Health & Safety Manager to ensure that you are adhering to your company's safety programs to prevent employee injury.

- Reduce or eliminate repetitive motion
- Maintain a natural position
- Reduce or eliminate excessive force
- Keep objects that are used frequently within easy reach
- Perform tasks at correct heights
- Reduce or eliminate vibration
- Reduce or eliminate direct pressure
- Provide adjustable workstations
- Provide adequate clearance
- Provide a suitable working environment
- Improve work procedures.

REGULATORY INFORMATION

Zebra reserves the right to make changes to any product to improve reliability, function, or design. Zebra does not assume any product liability arising out of, or in connection with, the application or use of any product, circuit, or application described herein.

Power Supply
Use ONLY an approved UL LISTED ITE (IEC/EN 60950-1, LPS) power supply with electrical ratings: output 5 Vdc, min 850mA with a maximum ambient temperature of at least 50 degrees C.

Warranty
For the complete Zebra hardware product warranty statement, go to: <http://www.zebra.com/warranty>

Service Information
If you have a problem using the equipment, contact your facility's Technical or Systems Support. If there is a problem with the equipment, they will contact the Global Customer Support Center at: <http://www.zebra.com/support>.

For the latest version of this guide go to: <http://www.zebra.com/support>.

Waste Electrical and Electronic Equipment (WEEE)

English: For EU Customers: All products at the end of their life must be returned to Zebra for recycling. For information on how to return product, please go to: <http://www.zebra.com/weee>.

Laser Labels

In accordance with Clause 5, IEC 825 and EN60825, the following information is provided to the user:

Table with multiple columns containing laser safety information in various languages including English, Hebrew, Italian, Danish, Dutch, Norwegian, Portuguese, Spanish, Swedish, Chinese, Japanese, Korean, and German. It includes classification levels (Class 1, Class 2) and safety instructions.

Regulatory Information

This guide applies to Model Number LS2208. All Zebra devices are designed to be compliant with rules and regulations in locations they are sold and will be labeled as required.

Local language translations are available at the following website: <http://www.zebra.com/support>.

Laser Devices

Complies with 21CFR1040.10 & 1040.11 except for deviations pursuant to Laser Notice NO. 50, dated June 24, 2007 and IEC/EN 60825-1:2007 and/or IEC/EN 60825-1:2014. The laser classification is marked on one of the labels on the product.

Caution: Use of controls, adjustments or performance of procedures other than those specified herein may result in hazardous laser light exposure. Class 2 laser scanners use a low power, visible light diode. As with any very bright light source, such as the sun, the user should avoid staring directly into the light beam.

Radio Frequency Interference Requirements

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications.

- Reorient or relocate the receiving antenna
Increase the separation between the equipment and receiver
Connect the equipment into an outlet on a circuit different from that to which the receiver is connected
Consult the dealer or an experienced radio/TV technician for help.

Radio Frequency Interference Requirements - Canada

This Class B digital apparatus complies with Canadian ICES-003. Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

Marking and European Economic Area (EEA)



Statement of Compliance

Zebra hereby declares that this device is in compliance with all applicable Directives, 2014/30/EU, 2014/35/EU and 2011/65/EU. The full text of the EU Declaration of Conformity is available at the following internet address: <http://www.zebra.com/doc>.

Japan (VCCI) - Voluntary Control Council for Interference


この装置は、情報処理装置等電波障害自主規制協議会 (VCCI) の基準に基づくクラス B 情報技術装置です。この装置は、家庭環境で使用することを目的としていますが、この装置がラジオやテレビジョン受信機に近接して使用されると、受信障害を引き起こすことがあります。取扱説明書に従って正しい取り扱いをして下さい。This is a Class B product based on the standard of the Voluntary Control Council for Interference from Information Technology Equipment (VCCI). If this is used near a radio or television receiver in a domestic environment, it may cause radio interference. Install and use the equipment according to the instruction manual.



Zebra Technologies Corporation
Lincolnshire, IL U.S.A.
http://www.zebra.com
Zebra and the stylized Zebra head are trademarks of ZIH Corp., registered in many jurisdictions worldwide. All other trademarks are the property of their respective owners.



72-71882-03 Revision A December 2016

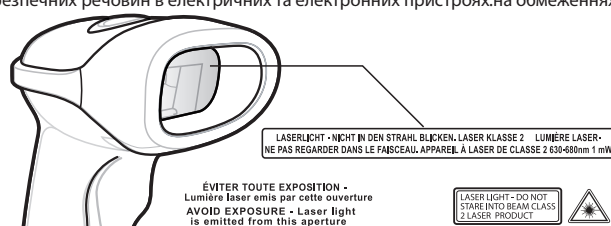

LS2208

<http://www.zebra.com/ls2208>

POST IN WORK AREA